



Appearance and Dimensions

A	B	C	D	E	F	G	H	J	K	L	R	R1
3891	1810	1930	2300	330	1503	794	36°	55°	12°	117°	3310	5960

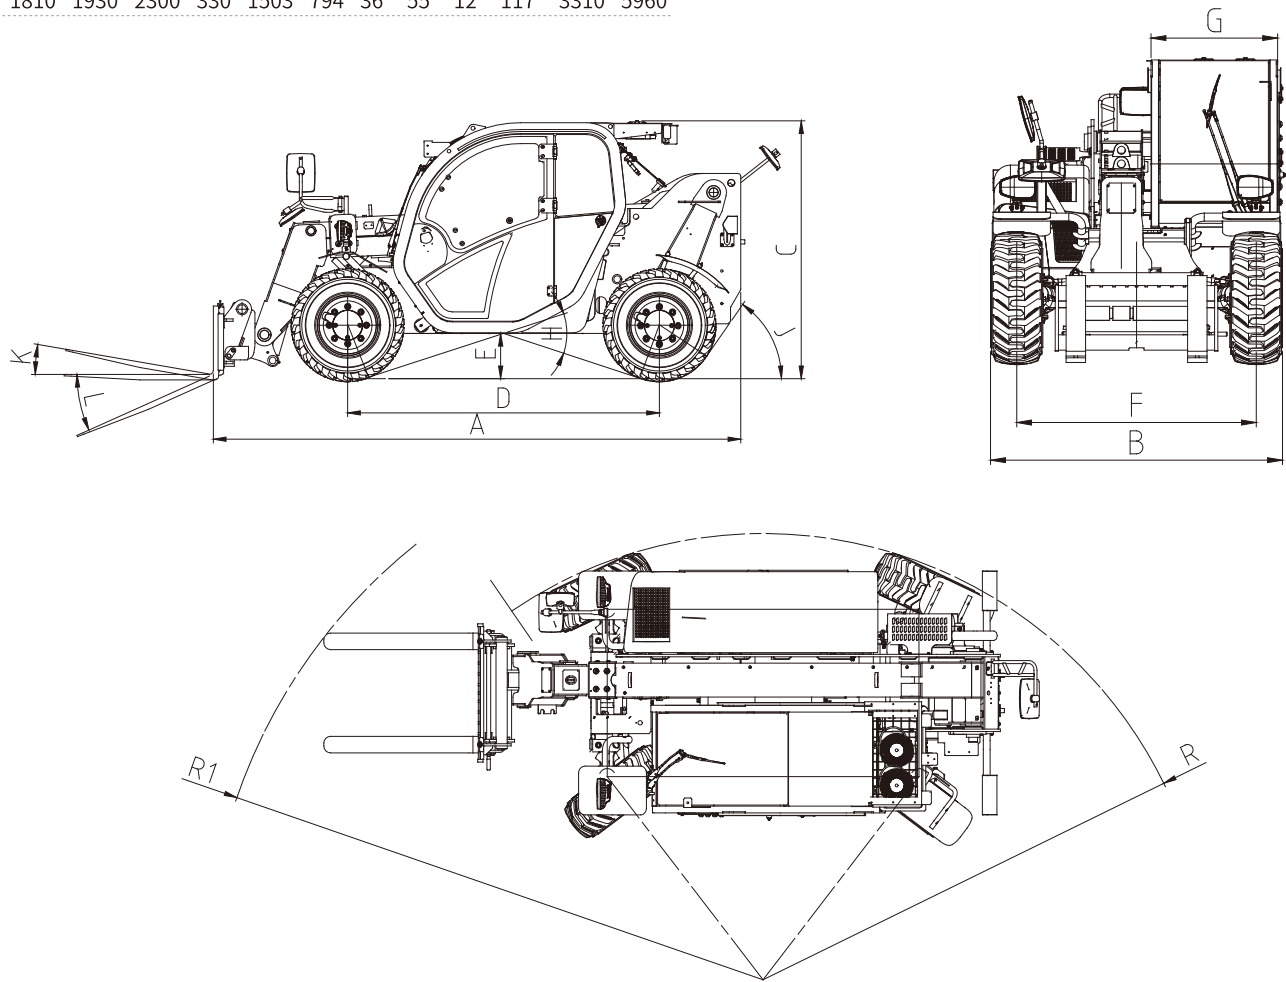

2.5t
Telescopic Handlers

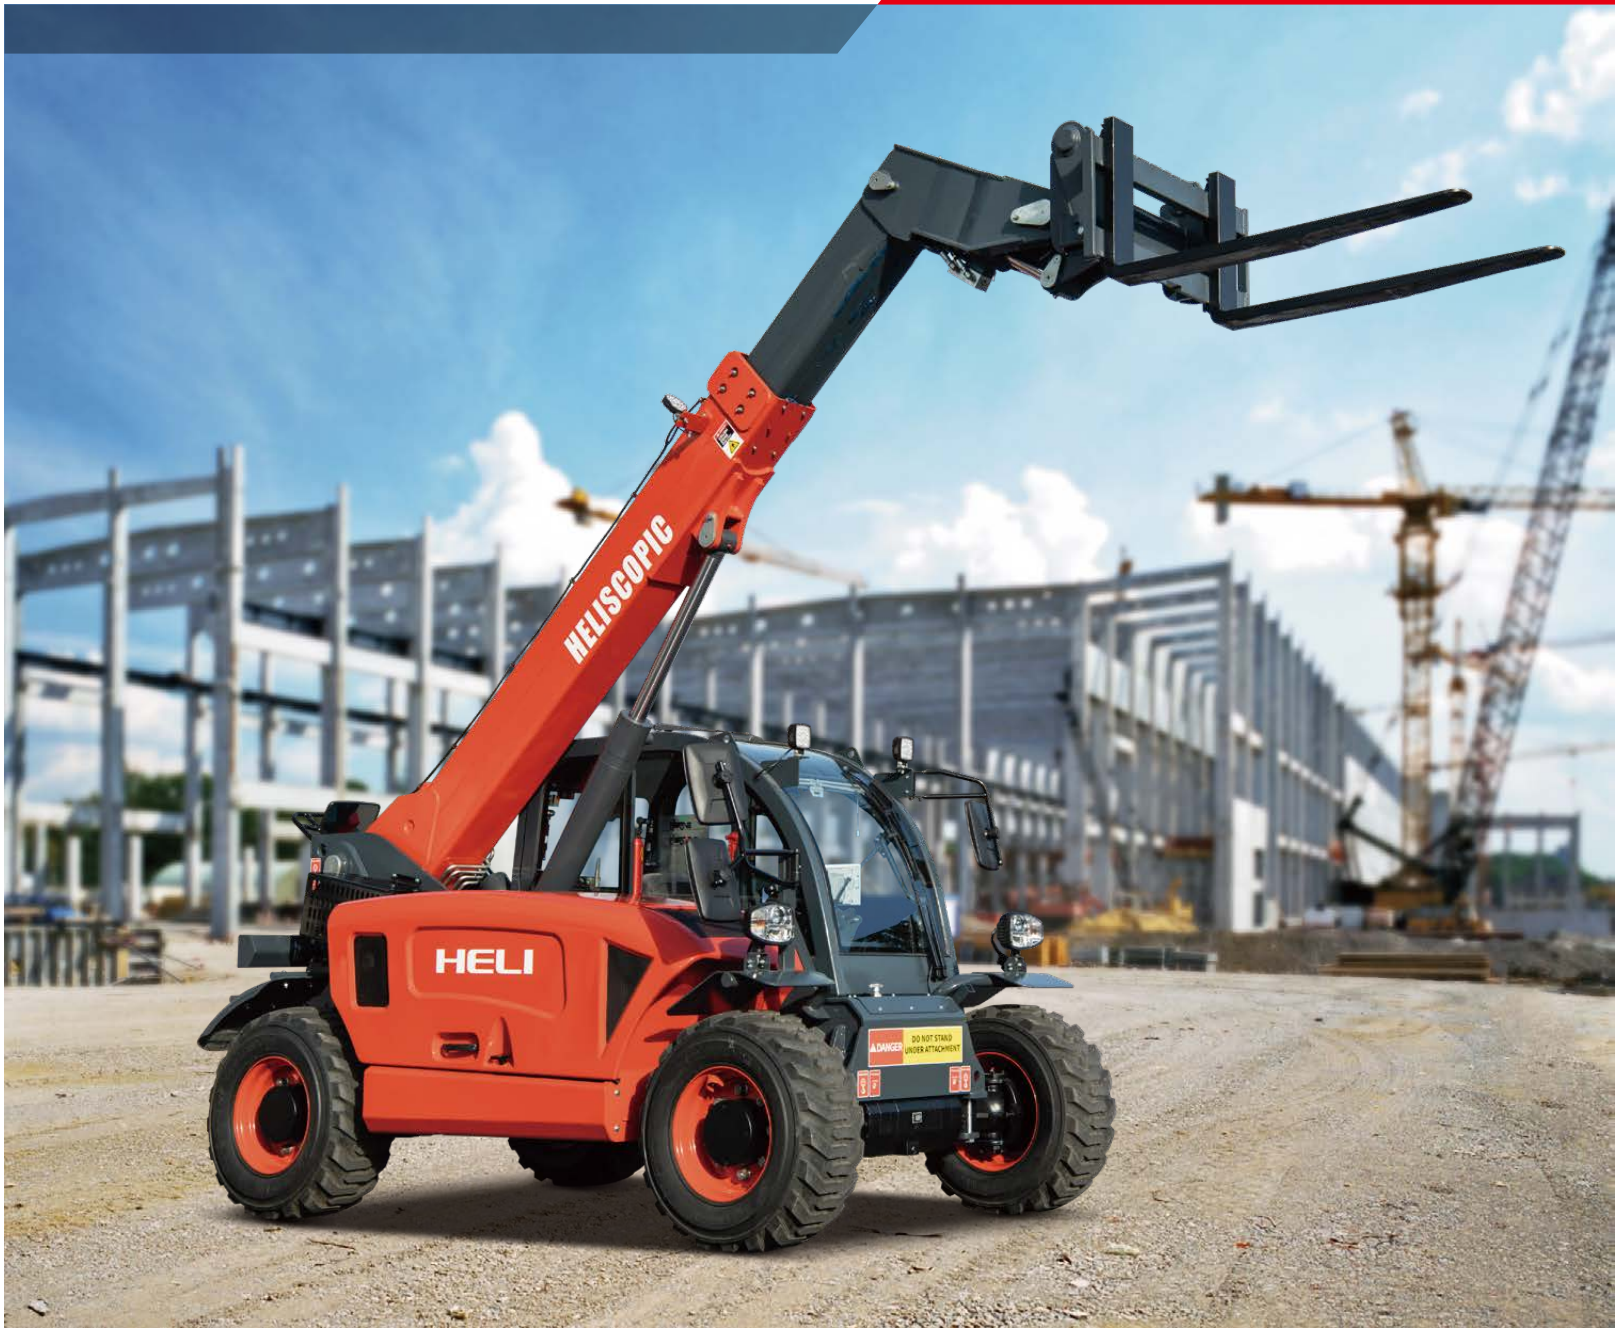

HELI MATERIAL HANDLING OCEANIA PTY LTD

📍 Sydney: 8 Hexham Place Wetherill Park, NSW2164
Brisbane: 166 Boniface St, Archerfield, QLD 4108
☎ 0287836181(Sydney) 0733482629(Brisbane)
✉ info@heliau.com.au
🌐 heliau.com.au

Design&Print:Fokeli Printing 20250318

* Our products are subject to improvements and changes without notice.

- Maximum capacity:2500kg
- Maximum lifting height:5890mm
- Maximum horizontal extension:3400mm
- Transmission mode:Hydrostatic drive
- Steering mode:
four steering,front wheel steering,cab steering



Lifting capacity

Maximum capacity	kg	2500
Maximum lifting height	mm	5890
Maximum horizontal extension	mm	3400
Transmission mode		Hydrostatic drive
Steering mode		Four steering, front wheel steering, cab steering
Weight	Kg	5020

Dimensions

A Overall length	mm	3891
B Overall width	mm	1810
C Overall height	mm	1930
D Wheel base	mm	2300
E Ground clearance	mm	330
F Front track	mm	1503
G Outside width of cab	mm	794
H Vehicle passing angle	°	36
J Vehicle departure angle	°	55
K Tilt angle of fork	°	12
L Tilt angle of fork	°	117
R Turning radius	mm	3310
R1 Turning radius	mm	5960

Engine

Manufacturer	Kubota
Emission standard	Stage III
Model	V3307
Displacement	3.331L
Rated power/speed	55.4Kw@2600rpm
Maximum torque/RPM	265N@ 1600rpm

Attachments

Loading bucket
Sideshifters

25THCJ06-KU Lifting diagram

