

HELI

3-3.5 t Telescopic Handlers



- Maximum capacity:3000/3500kg
- Maximum lifting height:7m
- Maximum horizontal extension:3.745m
- Transmission mode:Hydrostatic drive
- Steering mode:four steering,front wheel steering,cab steering

30/35THCJ07-CU1/CU/Q

Lifting capacity

Maximum capacity	kg	3000/3500
Maximum horizontal extension	mm	3745
Maximum lifting height	mm	7000

Dimensions

A Overall length	mm	4886
B Overall width	mm	2300
C Overall height	mm	2530
D Wheel base	mm	2850
E Ground clearance	mm	380
F Front track	mm	1860
G Outside width of cab	mm	940
H Vehicle passing angle	°	34
J Vehicle departure angle	°	49
K Tilt angle of fork	°	12
L Tilt angle of fork	°	110
R Turning radius	mm	3980
R1 Turning radius	mm	4985


Attachments

Straight crane jib
Straight crane jib with wingch
Angle crane jib
Angle crane jib with wingch
Loading bucket



Engine

Models	30/35THCJ07-CU1	30/35THCJ07-CU	30/35THCJ07-Q
Manufacturer	Dongfeng Cummins	Dongfeng Cummins	Quanchai
Emission standard	China stage III	China stage IV	China stage IV
Model	QSB3.9-C110	B3.9CS4 110C	V36-110C42
Displacement	3.9L	3.9L	3.62L
Rated power/speed	81kW@2200rpm	81kW@2500rpm	81kW@2300rpm
Maximun torque/RPM	480N.m@1600rpm	480N.m@1600rpm	430N.m@1600rpm

30/35THCJ07-CU1/CU/Q Appearance and Dimensions

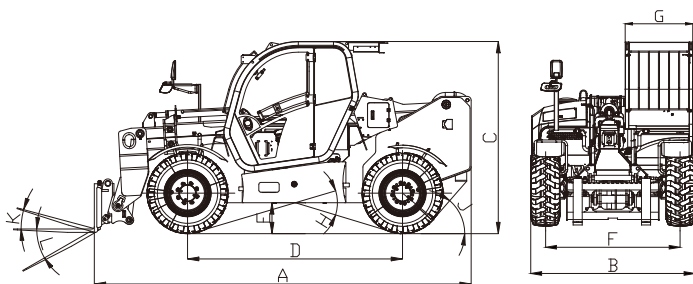

30/35THCJ07-CU1/CU/Q Lifting diagram

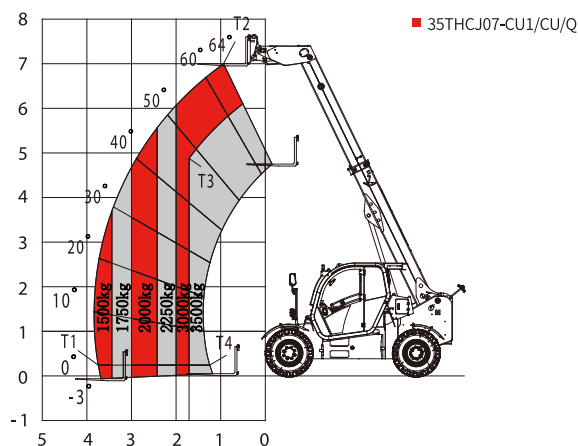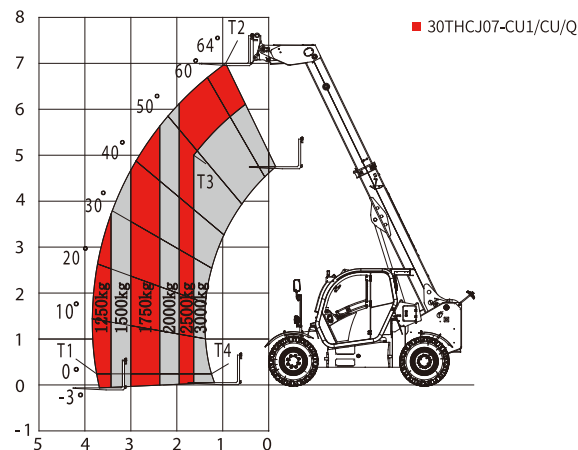

尺寸	Dimensions
A	4886
B	2300
C	2530
D	2850
E	380
F	1860
G	940
H	34
J	49
K	12°
L	110°
R	3980
R1	4985

Design&Print:Fokeli Printing 20240807



ANHUI HELI CO., LTD.

Add / No.668, FangXing Road, Hefei, China
 Fax / +86-551-63639966
 Tel / +86-551-63639068(America); 63639258(Europe);
 63639358(Asia); 63662105(Africa & Middle East)

* Our products are subject to improvements and changes without notice.



LinkedIn



YouTube



Facebook